





**JAMAX®**

Böcker - Løft og tilkomst



## Simply Inclined Lift

# Simply Inclined Lift – the robust all-rounder for all applications

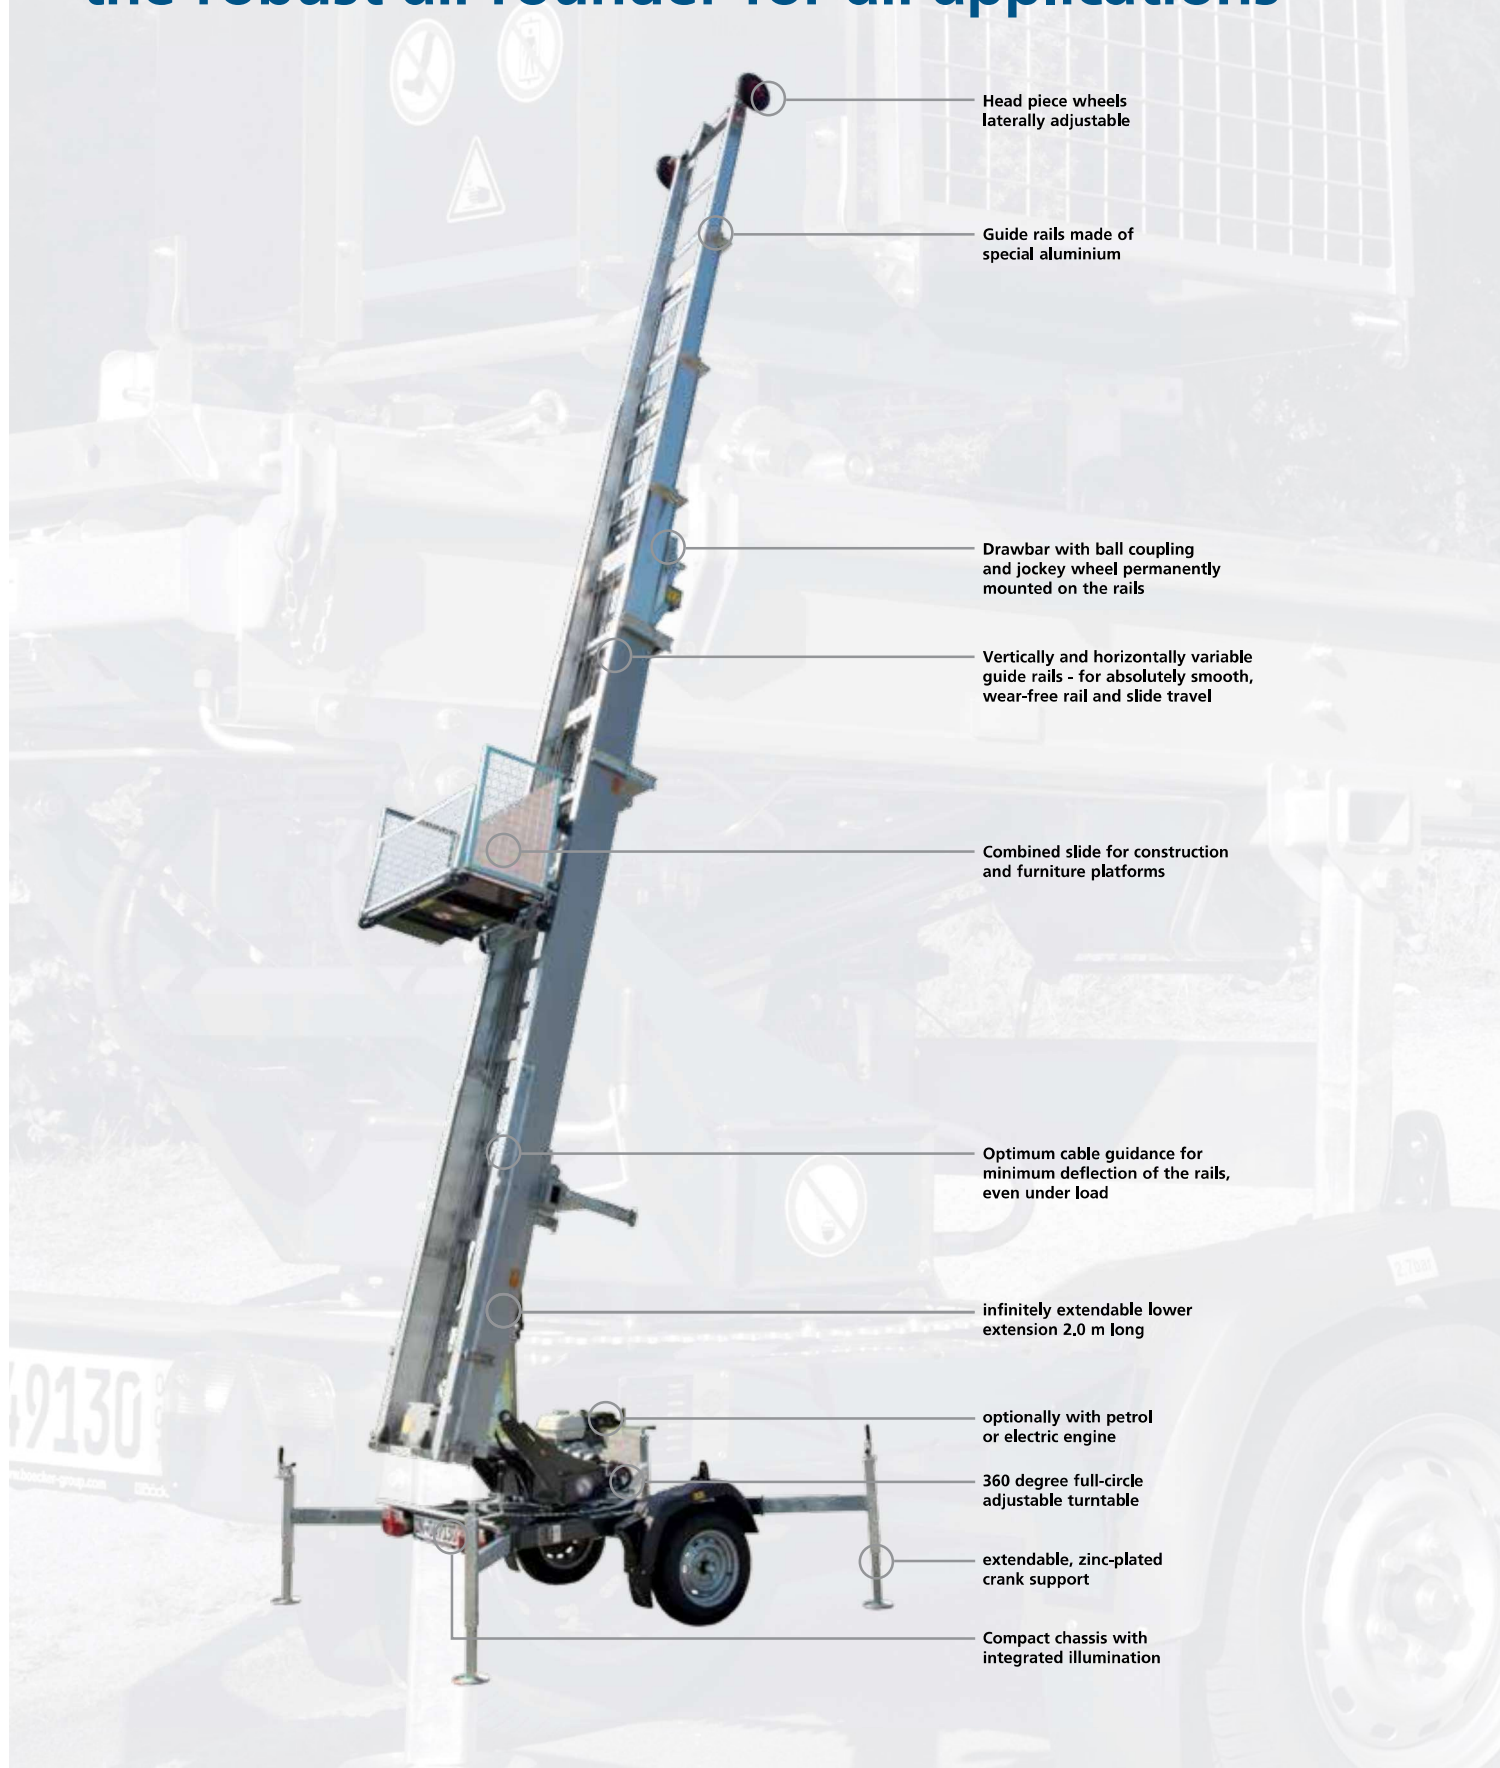

Head piece wheels  
laterally adjustable

Guide rails made of  
special aluminium

Drawbar with ball coupling  
and jockey wheel permanently  
mounted on the rails

Vertically and horizontally variable  
guide rails - for absolutely smooth,  
wear-free rail and slide travel

Combined slide for construction  
and furniture platforms

Optimum cable guidance for  
minimum deflection of the rails,  
even under load

infinitely extendable lower  
extension 2.0 m long

optionally with petrol  
or electric engine

360 degree full-circle  
adjustable turntable

extendable, zinc-plated  
crank support

Compact chassis with  
integrated illumination

## Simply the best

The universal inclined lift "Simply" combines the attributes "Good, efficient and affordable" like no other high-quality lift model and is characterised in particular by its robust construction and easy operation. The extremely low space requirement and simple assembly make "Simply" an all-rounder for all applications.

### The advantages at a glance:

- Can be used as a construction or furniture lift with a petrol or electric engine
- Extremely low clearance width and height thanks to compact design
- Easily manoeuvrable on site with a dead weight of only 750 kg
- For transport with almost any passenger car and an appropriate driving license
- Minimum space needed due to a low on-site floor of only 4.6 m<sup>2</sup>
- Optimum working radius of 360 degrees thanks to full-circle adjustable turntable lock
- Highest level of reliability and operating comfort even for untrained personnel thanks to tried and tested simple control technology
- Short assembly times due to hydraulic raising and/or extending of the rails and easily extendable crank supports
- Specially treated chassis and protective coating in nova grey guarantee highest durability
- Chassis with particularly low centre of gravity ensures optimum driving stability
- Robust guide rails made of special aluminium enable highest payloads of up to 250 kg
- Most various load-bearing equipment can be used e.g. tile platforms, bulk material buckets, window platforms, furniture platforms etc.
- Buckle bar can be made from 20 to 45 degrees depending on the roof inclination, available as a mechanically attachable version



Drawbar with ball coupling permanently on the rails



Compact chassis with integrated illumination



Drive via 230 volt electric engine or Honda petrol engine

### Technical data Simply HD 21 / 1–5

Payload [kg]	250
Permissible total weight (kg)	750 kg brakeless
Driving license class	B
Extendable from – to [m]	5,15 to 20,60
Lift length [m]	5,90
Lift width [m]	1,45
Lift height without platform [m]	1,50
Floor space [m]	2,00 x 2,30
Drive	230 volts / 2,6 kW electric engine or 5,5 HP petrol engine

Technical modifications reserved.



Extendable crank supports



**JAMAX®**

Böcker - Løft og tilkomst

---

**JAMAX®**

Stillssystemer

**JAMAX®**

Rullestillas

**JAMAX®**

Flytebrygger

**JAMAX®**

Böcker - Løft og tilkomst

**Alutec AS**

Industrivegen 43  
5210 OS

56 30 41 00  
info@alutec.no  
alutec.no



**Böcker Maschinenwerke GmbH**

Lippestraße 69-73  
D-59368 Werne

+49 (0) 23 89/79 89-0  
info@boecker-group.com  
www.boecker-group.com